


RECOMMENDED PCB LAYOUT (COMPONENT SIDE)

NOTES: TOLFRANCF+0.05mm PCB THICKNFSS 1.20mm

- MATERIAL:
 - 1.1 HOUSING: LCP, UL94 V-0, COLOR: BLACK.
 - 1.2 CONTACTS: PHOSPHOR BRONZE
 - 1.3 SHELL: SUS301-1/4H
- PLATING:
 - 2.1 CONTACTS: NICKEL(50u" MIN.) UNDER PLATING OVERALL TIN(80u"MIN.) PLATING ON SOLDER AREA AU(Gold Flash) PLATING ON CONTACT AREA
 - 2.2 SHELL: NICKEL(50U"MIN.) PLATING OVERALL
- SPECIFICATION:
 - 3.1 CONTACT CURRENT RATING: 1.5 Amp
 - 3.2 DIELECTRIC WITHSTANDING VOLTAGE: AC 500V r.m.s.
 - 3.3 INSULATION RESISTANCE: 1000MΩ MIN.
 - 3.4 OPERATING TEMPERATURE: -55°C to +85°C
 - 3.5 CONTACT RESISTANCE: 30 MΩ MAX.
 - 3.6 MATING: 3.57 KGF
UNMATING: 1.02 ~ 3.57 KGF
DURABILITY:5000 CYCLES

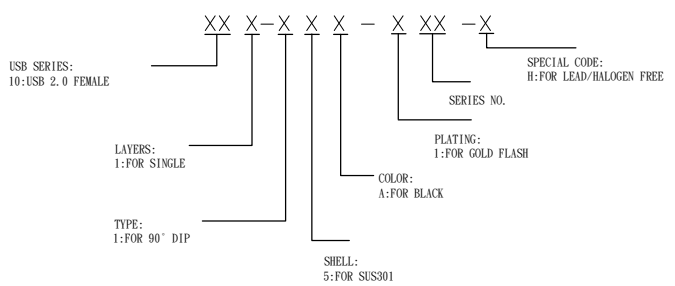

V LOGO
XXXXX—DATE CODE

星期 例如:星期一 為1
週 例如:第41週為41
年 例如:2012年為12

廷奕科技股份有限公司
VITETECH CO., LTD

REV.	ECN.NO.	APP.	DATE
B	Official Publish	Emily	MAY/25/11
C	Official Publish	Jack	JAN/18/13

RoHS COMPLIANT			
DIMENSION CLASSIFICATION			
Ⓢ:CRITICAL Ⓣ:MAJOR ():REFERENCE			
REVISED	C	APPROVE	DATE
DRAW	CHK'D	BT	Jack
		Emily	JAN/18/13

PRODUCT CUSTOMER COPY	
SCALE	SHEET
1:1	
GENERAL TOLERANCE	
X.±0.50	.X ±0.40
.XX ±0.38	
.XXX ±0.35	
X.' ±0.30	.X'

PART NO: 101-15A-182-H
DWG NAME:
USB 無唇邊 沉板式 反向型 LCP H=3.63 捲裝